

CBCS SCHEME

USN

| | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|
| | | | | | | | | | |
|--|--|--|--|--|--|--|--|--|--|

15EC54

**Fifth Semester B. E. Degree Examination, Dec.2019/Jan.2020
Information Theory and Coding**

Time: 3 hrs.

Max. Marks: 80

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.
2. Any revealing of identification, appeal to evaluator and/or equations written e.g. $42+8 = 50$, will be treated as malpractice.


Note: Answer any FIVE full questions, choosing ONE full question from each module.

Module-1

- 1 a. Define entropy and list the properties of entropy. (04 Marks)
- b. Consider a zero memory source emitting three symbols s_1, s_2 and s_3 with respective probabilities 0.5, 0.3 and 0.2. Calculate: i) Entropy of the source ii) All symbols and the corresponding probabilities of the second order extension. Also, find entropy of extended source iii) Show that $H(s^2) = 2H(s)$. (08 Marks)
- c. Show that $I_{Nat} = 1.443$ bits. (04 Marks)

OR

- 2 a. Define Markoff source. Explain with typical transition state diagram. (06 Marks)
- b. For the Markoff source shown in Fig.Q.2(b), find
 - i) State probabilities
 - ii) State entropies
 - iii) Source entropy.



(10 Marks)

Module-2

- 3 a. State and prove source coding theorem. (08 Marks)
- b. Consider a discrete memoryless source with three symbols $S = \{X, Y, Z\}$ with $P = (0.5, 0.35, 0.15)$
 - i) Use Shannon's first encoding technique and find the codewords for the symbols. Also, find the source efficiency and redundancy.
 - ii) Consider the second order extension of the source. Recompute the codewords, efficiency and redundancy. (08 Marks)

10 JAN 2020

OR

- 4 a. Consider a discrete memoryless source with $S = \{A, B, C, D\}$ with $P = \{0.4, 0.3, 0.2, 0.1\}$. Find the codeword using Huffman coding. Compute efficiency and variance. (08 Marks)
 b. Write a note on LZ-Algorithm with an example. (08 Marks)

Module-3

- 5 a. Show that
 For the Joint Probability Matrix (JPM) given, find: i) $H(X)$ ii) $H(Y)$ iii) $H(X, Y)$ iv) $H(Y/X)$ and v) $H(X/Y)$ (06 Marks)

$$JPM = P(X, Y) = \begin{matrix} & \begin{matrix} y_1 & y_2 & y_3 & y_4 \end{matrix} \\ \begin{matrix} x_1 \\ x_2 \\ x_3 \\ x_4 \end{matrix} & \begin{bmatrix} 0.2 & 0 & 0 & 0.05 \\ 0 & 0.15 & 0.15 & 0 \\ 0 & 0 & 0.10 & 0.05 \\ 0.10 & 0.10 & 0 & 0.10 \end{bmatrix} \end{matrix}$$

(10 Marks)

OR

- 6 a. State and explain Muroga's theorem. (04 Marks)
 b. Find the capacity of the channel for the channel matrix $P(Y/X)$:

$$P(Y/X) = \begin{matrix} & \begin{matrix} y_1 & y_2 & y_3 \end{matrix} \\ \begin{matrix} x_1 \\ x_2 \\ x_3 \end{matrix} & \begin{bmatrix} 0.2 & 0.5 & 0.3 \\ 0.2 & 0.6 & 0.2 \\ 0.1 & 0.1 & 0.8 \end{bmatrix}$$
 (08 Marks)
 c. Briefly explain Differential Entropy. (04 Marks)

Module-4

- 7 a. Briefly explain the need of parity/redundant bits in the data transmission. Also, explain how errors can be tackled using:
 i) FEC (Forward Error Correction) ii) ARQ codes (Automatic Repeat Request Codes). (06 Marks)
 b. Consider a (6, 3) Linear Block Code (LBC) with generator matrix

$$G = \begin{bmatrix} 1 & 0 & 0 & 1 & 1 & 1 \\ 0 & 1 & 0 & 1 & 1 & 0 \\ 0 & 0 & 1 & 1 & 0 & 1 \end{bmatrix}$$

- Find:
 i) All codewords
 ii) All Hamming weights
 iii) Minimum Hamming weight and distance
 iv) Parity Check Matrix (PCM)
 v) Draw the encoder circuit. (10 Marks)

OR

- 8 a. Explain the syndrome calculation and error detection with the help of neat circuit diagram for cyclic codes. (06 Marks)
 b. Consider a (15, 7) binary cyclic code with $g(x) = 1 + x^4 + x^6 + x^7 + x^8$
 i) Draw the encoder circuit.
 ii) Obtain the codeword for the input (001111)
 iii) Draw the syndrome calculating circuit. (10 Marks)

Module-5

- 9 a. Briefly explain: i) Golay codes ii) BCH codes (06 Marks)
 b. Consider the convolution encoder shown in Fig. Q.9(b)
 i) Write the impulse response of the encoder.
 ii) Find the output for the message (10011) using time-domain approach.
 iii) Find the output for the message (10011) using transform domain approach.

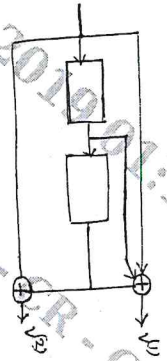


Fig. Q.9(b)

(10 Marks)

OR

- 10 a. Explain various ways to represent convolution codes. (06 Marks)
 b. For the convolution encoder $g^{(0)} = 110, g^{(1)} = 101, g^{(2)} = 111$
 i) Draw the encoder block diagram for (3, 1, 2) convolution code
 ii) Find generator matrix
 iii) Find codewords corresponding to information sequence 11101 using time domain and transform domain approach. (10 Marks)
