

USN									
-----	--	--	--	--	--	--	--	--	--

10EE52

**Fifth Semester B.E. Degree Examination, Aug./Sept.2020**  
**Signals and Systems**

Time: 3 hrs.

Max. Marks:100

Note: Answer FIVE full questions, selecting atleast TWO questions from each part.

**PART – A**

- 1 a. Distinguish between :
  - i) Energy signal and power signal
  - ii) Even and odd signal
  - iii) Periodic and non-periodic signal. (06 Marks)
- b. Determine whether or not the following signal is periodic. If it is periodic, determine its fundamental period :
  - i)  $x[n] = \sin\left[\frac{1}{3}(\pi n)\right] \cdot \cos\left[\frac{1}{5}(\pi n)\right]$
  - ii)  $x[n] = \cos\frac{1}{3}n$ . (04 Marks)
- c. For the given signal  $x(t)$  as shown in Fig.Q1(c) sketch the following :

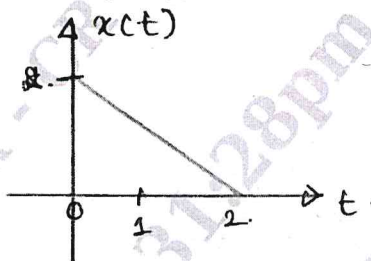


Fig.Q1(c)

- i)  $x[2(t-2)]$
      - ii)  $x(-2t-1)$
      - iii)  $x\left(\frac{t}{2}+2\right)$
      - iv)  $x(-t)$ . (04 Marks)
    - d. Determine whether the system given below is :
      - i) Linear
      - ii) Time invariant
      - iii) causal
      - iv) Memoryless  $y(t) = e^{x(t)}$ . (06 Marks)
  - 2 a. Determine the convolution of  $x_1(t) = e^{-3t} u(t)$  and  $x_2(t) = u(t+2)$ . Also sketch the result. (08 Marks)
    - b. Find the step response of an LTI system if the impulse response  $h(t) = t^2 \cdot u(t)$ . (06 Marks)
    - c. Determine the convolution sum of the sequences.  
 $x_1[n] = \{1, 1, 0, 1, 1\}$  and  $x_2[n] = \{1, -2, -3, 4\}$ . (06 Marks)
- 3 a. Distinguish between forced response and natural response. Find the forced response for the system given by :  $\frac{d^2 y(t)}{dt^2} + 3 \frac{dy(t)}{dt} + 2y(t) = x(t) + \frac{d}{dt} x(t)$  input  $x(t) = 5 \cdot u(t)$ . (08 Marks)
  - b. Draw the direct form – I and direct form – II implementations for the system described by the difference equation :  $y[n] - \frac{1}{4} y[n-1] + \frac{1}{8} y[n-2] = x[n] + \frac{1}{2} x[n-1]$ . (06 Marks)
  - c. For each of the impulse responses, determine whether the corresponding system is memoryless, causal and stable.
    - i)  $h(t) = e^{2t} \cdot u(t-2)$
    - ii)  $h[n] = 2^n \cdot u[-n]$ . (06 Marks)

CMRIT LIBRARY  
 BANGALORE - 560 037

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.  
 2. Any revealing of identification, appeal to evaluator and /or equations written eg. 42+8 = 50, will be treated as malpractice.

- 4 a. State and prove time shift property as applied to Fourier series. (06 Marks)  
 b. Determine the Fourier coefficients for the signal  $x(t)$  as shown in Fig.Q4(b). Plot its magnitude spectrum and phase spectrum.

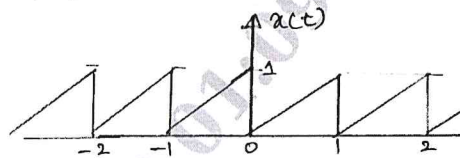


Fig.Q4(b)

- c. State and prove Parseval's theorem in case of Discrete Time Fourier Series (DTFS). (08 Marks)  
 (06 Marks)

## PART - B

- 5 a. State and prove convolution property of discrete time Fourier transforms. (06 Marks)  
 b. Obtain Fourier transform of the following signals :

i)  $x(t) = e^{at} u(-t)$

ii)  $x(t) = e^{-a|t|}$

(06 Marks)

- c. Obtain Fourier transform of the following sequences :

i)  $x[n] = -a^n \cdot u[-n - 1]$

ii)  $x[n] = \delta[n]$

iii)  $x[n] = a^n \cdot u[n]$ .

(08 Marks)

- 6 a. State and prove low pass sampling theorem. (10 Marks)  
 b. The system produces the output of  $y(t) = e^{-t} \cdot u(t)$  for an input of  $x(t) = e^{-2t} \cdot u(t)$ . Determine the impulse response and frequency response of the system. (10 Marks)

- 7 a. Define Z - transform of a signal. What does ROC mean? Mention the properties of ROC. (08 Marks)

- b. Find the Z - transform of :

i)  $x[n] = \alpha^n \cdot u[n]$

ii)  $x[n] = -u[-n - 1] + \frac{1}{2} \cdot u[n]$

Mention their ROC.

(06 Marks)

- c. Find the inverse Z - transform of the following using partial fraction expansion method :

$$x[z] = \frac{z+1}{3z^2 - 4z + 1} \text{ ROC } |z| > 1.$$

(06 Marks)

- 8 a. A causal LTI system is described by the difference equation :

$$y[n] = y[n - 1] + y[n - 2] + x[n - 1]$$

Find the system function  $H[z]$ . Plot the poles and zeros and indicate the ROC. Also determine the impulse response of the system. (06 Marks)

- b. Solve the following difference equation using unilateral Z - transform.

$$y[n] - \frac{3}{2} y[n - 1] + \frac{1}{2} y[n - 2] = x[n]$$

for  $n \geq 0$  with initial conditions,  $y[-1] = 4$ ,  $y[-2] = 10$  and  $x[n] = \left[\frac{1}{4}\right]^n \cdot u[n]$ . (10 Marks)

- c. Discuss the stability, causality and anticausality of the system from the nature of their transfer function. (04 Marks)

\*\*\*\*\*