

**Fourth Semester B.E. Degree Examination, Aug./Sept.2020
Signals and Systems**

Max. Marks:100

Note: Answer any FIVE full questions, selecting atleast TWO questions from each part.

PART - A

- 1 a. Sketch $y(t) = r(t+1) - r(t) + r(t-2)$. (05 Marks)
- b. Determine whether $x(n) = \cos(\frac{1}{5} \pi n) \sin(\frac{1}{3} \pi n)$ is periodic or not. If periodic, determine the period. (05 Marks)
- c. Check for casual memory, time - invariance, stable and linear properties of the system $y(n) = \log_{10}(|x(n)|)$. (05 Marks)
- d. Given

$$x(t) = \begin{cases} 5-t & ; 4 \leq t \leq 5 \\ 1 & ; -4 \leq t \leq 4 \\ t+5 & ; -5 \leq t \leq -4 \\ 0 & ; \text{otherwise} \end{cases}$$

Sketch $y(t) = x(10t-5)$. (05 Marks)

- 2 a. Determine the convolution integral of $x(t) = u(t-1) - u(t-3)$ and $h(t) = u(t) - u(t-2)$. (10 Marks)
- b. Determine the convolution sum of $y(n) = \beta^n u(n) * \alpha^n u(n)$; $|\alpha| < 1$ and $|\beta| < 1$. (10 Marks)
- 3 a. Determine the natural response of $y(n) - \frac{1}{2} y(n-1) = 2x(n)$; $y(-1) = 3$. (05 Marks)
- b. Determine the Forced Response of $\frac{d^2 y(t)}{dt^2} + 6 \frac{dy(t)}{dt} + 8y(t) = 2x(t)$; $x(t) = e^{-t} u(t)$. (10 Marks)
- c. Implement DF - I and DF - II for the system. $y(n) + \frac{1}{2} y(n-1) - \frac{1}{8} y(n-2) = x(n) + 2x(n-1)$. (05 Marks)
- 4 a. Evaluate the DTFS representation for the signal $x(n]$ shown in fig.Q4(a) and sketch spectra. Also verify Parseval's identity. (10 Marks)

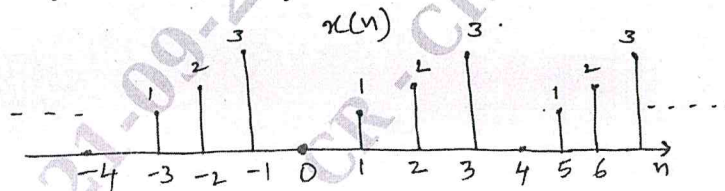


Fig.Q4(a)

- b. Find the Fourier series coefficient of the signal $x(t)$ shown in fig.Q4(b) and draw the spectra. (10 Marks)

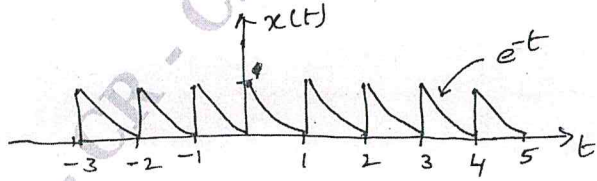


Fig.Q4(b)

(10 Marks)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.
2. Any revealing of identification, appeal to evaluator and /or equations written eg. 42+8 = 50, will be treated as malpractice.

CMRIT LIBRARY
BANGALORE - 560 037

PART - B

- 5 a. State and prove Parseval's theorem. Frequency shift and Time shift properties of DTFT. (12 Marks)
 b. Obtain the Fourier Transform of the signal $x(t) = e^{-at}$; $a > 0$. Draw its spectrum. (08 Marks)
- 6 a. Specify the Nyquist rate for each of the following signals.
 i) $x_1(t) = \sin(200t)$ ii) $x(t) = \cos(5\pi t) + 0.5 \cos(10\pi t)$. (06 Marks)
 b. The impulse response of a continuous time LTI system is given by

$$h(t) = \frac{1}{RC} e^{-t/RC} u(t)$$
. Find the frequency response and plot the magnitude and phase response. (08 Marks)
 c. State and explain Sampling Theorem. (06 Marks)
- 7 a. Determine the Z - transform of $x(n) = \left(\frac{1}{4}\right)^n u(-n)$. (05 Marks)
 b. Determine the Inverse of X(Z) for i) ROC : $|Z| < \frac{1}{2}$ ii) ROC : $\frac{1}{2} < |Z| < 3$
 iii) ROC : $|Z| > 3$.

$$X(Z) = \frac{Z^{-1}}{(1 - \frac{1}{2}Z^{-1})(1 + 3Z^{-1})}$$
. (10 Marks)
 c. State and prove differentiation in Z - domain property of Z - transform. (05 Marks)
- 8 a. Determine the Impulse response of the following system with
 $x(n) = \delta(n) + \frac{1}{4} \delta(n-1) - \frac{1}{8} \delta(n-2)$ and $y(n) = \delta(n) - \frac{3}{4} \delta(n-1)$. (10 Marks)
 b. Find the natural response of the system described by the difference equation through unilateral Z - transform.

$$y(n) - \frac{1}{4} y(n-1) - \frac{1}{8} y(n-2) = x(n) + x(n-1)$$
 with $y(-1) = 0$ and $y(-2) = 1$. (10 Marks)

CMRIT LIBRARY
 BANGALORE - 560 037