

Fifth Semester B.E. Degree Examination, June/July 2017
Modern Control Theory

Time: 3 hrs.

Max. Marks:100

**Note: Answer FIVE full questions, selecting
at least TWO questions from each part.**

PART - A

- 1 a. With respect to control systems compare modern control theory with classical control theory. (06 Marks)
- b. Given $\frac{y(s)}{u(s)} = \frac{3}{s^2 + 3s + 2}$ derive the controllable phase variable canonical form of state model and draw the state diagram. (06 Marks)
- c. Given $\frac{y(s)}{u(s)} = \frac{-[3s^2 + 4s - 7]}{(s+1)^2 (s+2)}$ derive Jordan canonical Form of state model. (08 Marks)

- 2 a. For the electrical shown in Fig. Q2(a) obtain the state model. Choose i_L and v_C as state variables. (06 Marks)

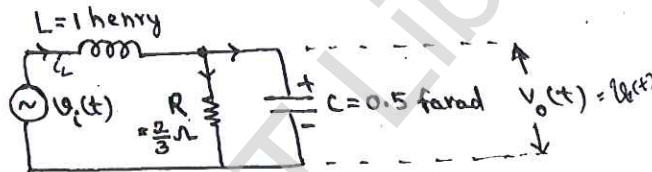


Fig. Q2(a)

- b. Obtain the state model of the block diagram shown in Fig Q2(b). (06 Marks)

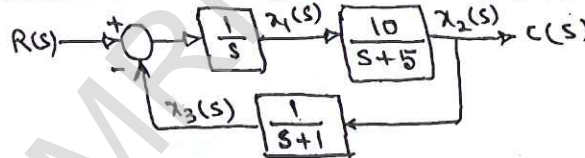


Fig. Q2(b)

- c. Derive the state model of an armature controlled d.c motor by selecting $x_1(t) = \theta(t)$ $x_2(t) = \dot{\theta}(t)$ and $x_3(t) = i_a(t)$ as state variables. (08 Marks)
- 3 a. Given $\dot{x}(t) = \begin{bmatrix} 0 & -1 \\ 2 & -3 \end{bmatrix} x(t) + \begin{bmatrix} 1 \\ 1 \end{bmatrix} u(s); y(t) = [1 \ 0] x(t)$
Determine the transfer function $y(s)/u(s)$. (06 Marks)
 - b. Define: state controllability, observability and state transition matrix. (06 Marks)
 - c. Given $\dot{x}(t) = \begin{bmatrix} 0 & 1 \\ -4 & -4 \end{bmatrix} x(t) + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u(t); y(t) = [1 \ 0] x(t)$
Determine eigen values, eigen vectors, transformation matrix P and hence transform the given state model in $x(t)$ into an alternate state model in $z(t)$ such that $x(t) = Pz(t)$. (08 Marks)
- 4 a. Given $A = \begin{bmatrix} 0 & 1 \\ -1 & -2 \end{bmatrix}$. Determine e^{At} using Cayley Hamilton method. (06 Marks)

b. Given $\dot{x}(t) = \begin{bmatrix} 1 & 1 \\ 2 & -1 \end{bmatrix} x(t) + \begin{bmatrix} 1 \\ 1 \end{bmatrix} u(t)$; $y(t) = [1 \quad -2]x(t)$

Determine: state controllability, output controllability and observability using KALHANS TEST. (06 Marks)

c. Given $\dot{x}(t) = \begin{bmatrix} 8 & -9 \\ 4 & -5 \end{bmatrix} x(t)$; $x(0) = \begin{bmatrix} 1 \\ 0 \end{bmatrix}$

Determine the state transition matrix using Laplace transform method and hence obtain $x(t)$. (08 Marks)

PART – B

5 a. Explain the concept of stability improvement of regulator by state feedback scheme. (06 Marks)

b. Given $\dot{x}(t) = \begin{bmatrix} 1 & 1 \\ -4 & -3 \end{bmatrix} x(t) + \begin{bmatrix} 0 \\ 2 \end{bmatrix} u(t)$

Determine the state feedback gain matrix K for the desired eigen values of -2 and -6 . Use Ackermann's formula. (06 Marks)

c. Given $\dot{x}(t) = \begin{bmatrix} 0 & 20.6 \\ 1 & 0 \end{bmatrix} x(t) + \begin{bmatrix} 0 \\ 2 \end{bmatrix} u(t)$; $y(t) = [0 \ 1]x(t)$.

Desired eigen values for the full order observer are $-1.8 \pm 2.4j$. Determine the observer gain matrix K_e using canonical transformation method. Also given observer equation. (08 Marks)

6 a. State and prove the necessary condition for state feedback design by arbitrary pole placement scheme. (06 Marks)

b. Given $\dot{x}(t) = \begin{bmatrix} 0 & 1 \\ 0 & 0 \end{bmatrix} x(t) + \begin{bmatrix} 0 \\ 1 \end{bmatrix} u(t)$; $y(t) = [1 \ 0]x(t)$. design a first order observer for the

system with observer pole at $s = -10$. Assume x_1 is measurable. Use direct substitution method. Also give the observer equation of the first order observer. (06 Marks)

c. With the help of relevant figures/equations/graphs explain the phenomena of non linearity with respect to the following. Frequency – amplitude dependence, multivariable responses and Jump resonance. (08 Marks)

7 a. Give the procedural steps of constructing phase trajectories using isoclines method. (06 Marks)

b. Explain Delta method of constructing phase trajectories. (06 Marks)

c. Identify and classify the singularities of the system given by $\ddot{y}(t) + 0.5\dot{y}(t) + 2y(t) + y^2(t) = 0$. (08 Marks)

8 a. State Liapunov stability theorems. (06 Marks)

b. Give $\dot{x}_1(t) = \begin{bmatrix} 0 & 1 \\ -2 & -3 \end{bmatrix} x(t)$. Determine its stability using Liapunov theorem and hence

determine a suitable Liapunov function. Take the matrix $Q = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix}$. (06 Marks)

c. Examine the stability of the system described by the following equation by Krasovskii's theorem. $\dot{x}_1(t) = -x_1(t)$, $\dot{x}_2(t) = x_1(t) - x_2(t) - x_2^3(t)$. (08 Marks)