

CBCS SCHEME

USN

--	--	--	--	--	--	--	--	--	--

15EC44

Fourth Semester B.E. Degree Examination, July/August 2022 Signals and Systems

Time: 3 hrs.

Max. Marks: 80

Note: Answer any FIVE full questions, choosing ONE full question from each module.

Module-1

- 1 a. Determine whether the discrete-time signal,

$$x(n) = \cos\left(\frac{n\pi}{4}\right) \sin\left(\frac{2\pi}{5}\right) \text{ is periodic. If periodic, find the fundamental period. (05 Marks)}$$

- b. Determine and sketch even and odd parts of the signal shown in the Fig.Q1(b).

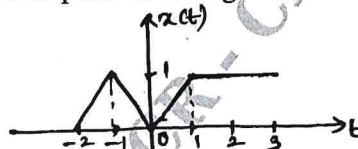


Fig.Q1(b)

(06 Marks)

- c. Prove the following properties of Impulse function:

i) $x(t) * \delta(t) = x(t)$

(ii) $x(t) * \delta(t - t_0) = x(t)$

(05 Marks)

OR

- 2 a. Determine whether the following systems are memoryless, causal, linear, time invariant and stable:

(i) $y(n) = n x(n)$

(ii) $y(t) = x(t/2)$

$|x(t)| \leq Mx < \infty$

(10 Marks)

- b. Sketch the waveforms of the following signals :

(i) $x(t) = u(t+1) - 2u(t) + u(t-1)$

(ii) $y(t) = r(t+1) - r(t) + r(t-2)$

(iii) $z(t) = -u(t+3) + 2u(t+1) - 2u(t-1) + u(t-3)$

(06 Marks)

Module-2

- 3 a. An LTI system is characterized by an impulse response $h(n) = (1/2)^n u(n)$. Find the response of the system for the input $x(n) = (1/4)^n u(n)$. (06 Marks)

- b. Find the convolution sum of the given two sequences $x(n) = \{1, 2, 3, 2\}$, $h(n) = \{1, 2, 2\}$ by using graphical convolution method. (10 Marks)

OR

- 4 a. Determine the convolution sum of the given sequences

$$x(n) = \{3, 5, -2, 4\} \quad \text{and} \quad h(n) = \{3, 1, 3\}.$$

(08 Marks)

- b. Perform graphical convolution to determine the output of the system, when the input and impulse response are given by $x(t) = e^{-4t}[u(t) - u(t-2)]$; $h(t) = e^{-2t}u(t)$. (08 Marks)

Module-3

- 5 a. For each impulse response listed below, determine whether the corresponding system is memoryless, causal and stable.

i) $h(n) = (0.99)^n u(n-3)$

ii) $h(t) = e^{-3t} u(t-1)$

(08 Marks)

- b. Find the complex exponential fourier series representation of the following signals:

i) $x(t) = \sin(2t + \pi/4)$

ii) $x(t) = \cos^2(t)$

(08 Marks)

OR

- 6 a. Find the complex fourier series coefficients for the periodic waveform shown in Fig.Q6(a). Also draw the amplitude and phase spectra.

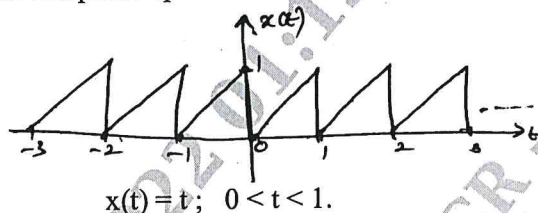


Fig.Q6(a)

- (08 Marks)
- b. Find the step response of an LTI system, whose impulse response is given by the following:
- i) $h(t) = t^2 u(t)$ ii) $h(t) = e^{-t} u(t)$ (08 Marks)

Module-4

- 7 a. Show that the fourier transform of a rectangular pulse described by :

$$x(t) = 1 \quad ; \quad -T \leq t \leq T$$

$$= 0 \quad ; \quad |t| > T$$

is a sinc function. Plot its magnitude and phase spectrum. (08 Marks)

- b. If $x(t) \xrightarrow{FT} X(j\omega)$ or $X(e^{j\omega})$ and $y(t) \xrightarrow{FT} Y(j\omega)$ or $Y(e^{j\omega})$,
Show that $z(t) = x(t) * y(t) \xrightarrow{FT} X(j\omega)Y(j\omega)$ or $X(e^{j\omega})Y(e^{j\omega})$ (08 Marks)

OR

- 8 a. State sampling theorem and explain aliasing effect with relevant waveforms. (04 Marks)
- b. Specify Nyquist rate and Nyquist interval for each of the following signals.
- i) $x(t) = \sin^2(2000t)$ (06 Marks)
- ii) $y(t) = \sin c(200t) + \sin c^2(200t)$ (06 Marks)
- c. Find the DTFT of the signal $a^n u(n)$ its magnitude and phase spectrum. (06 Marks)

Module-5

- 9 a. Using properties of z-transform, find the convolution of
 $x(n) = \{1, 2, -1, 0, 3\}$ and $y(n) = \{1, 2, -1\}$ (05 Marks)
- b. State and prove differentiation property of Z-transform. (06 Marks)
- c. Find the z-transform of $x(n) = \alpha^{|n|}$, $|\alpha| \neq 1$ and determine its ROC. (05 Marks)

OR

- 10 a. A causal discrete-time LTI system is described by

$$y(n) - \frac{3}{4}y(n-1) + \frac{1}{8}y(n-2) = x(n)$$

where $x(n)$ and $y(n)$ are the input and output of the system respectively.

- i) Determine the system function, $H(z)$
- ii) Find the impulse response, $h(n)$
- iii) Find the step response of the system
- iv) Find the frequency response of the system.
- v) Find BIBO stability of the system. (10 Marks)
- b. Find the inverse z-transform of the function

$$X[z] = \frac{z-4}{z^2-5z+6}$$

(06 Marks)
