


--	--	--	--	--	--	--	--	--	--

**Fourth Semester B.E. Degree Examination, June/July 2016**

**Structural Analysis – I**

Time: 3 hrs.

Max. Marks: 100



**Note: Answer FIVE full questions, selecting at least TWO questions from each part.**

**PART – A**

- 1 a. Explain static indeterminacy and kinematic indeterminacy of structures with examples. (06 Marks)
- b. Derive an expression for strain energy stored in a beam due to bending with usual notations. (08 Marks)
- c. Explain any three structural forms with examples. (06 Marks)
- 2 a. Determine the slope and deflection at the free end of the cantilever beam of span  $l$  subjected to  $udl$  of intensity  $\omega$ /unit length throughout the span.  $EI$  is constant. Use moment area theorem. (08 Marks)
- b. Find the slope at support A and deflection at centre span of a simply supported beam subjected to loading as shown in Fig.Q2(b). Use conjugate beam method.  $E$  is constant.

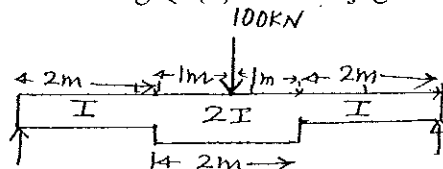


Fig.Q2(b)

(12 Marks)

- 3 Find the vertical deflection at the joint C for the pin jointed truss shown in Fig.Q3, by strain energy method. The cross sectional area is shown. Take  $E = 200 \text{ kN/mm}^2$ .

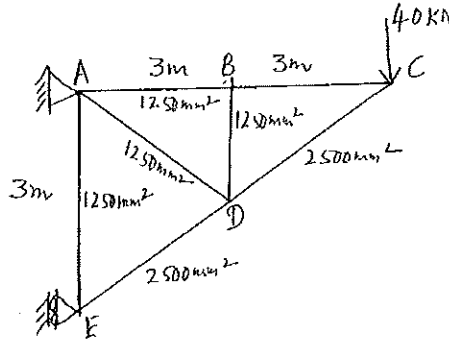


Fig.Q3

(20 Marks)

- 4 a. Determine horizontal and vertical component of deflection at point 'C' for the frame loaded as shown in Fig.Q4 by strain energy method.




Fig.Q4

(14 Marks)

- b. Using strain energy method, compute the deflection at mid span of a simply supported beam carrying a uniformly distributed load of  $\omega \text{ kN/m}$ . Assume an uniform flexural rigidity.

(06 Marks)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.  
2. Any revealing of identification, appeal to evaluator and/or equations written eg. 42+8 = 50, will be treated as malpractice.

**PART – B**

- 5 a. Derive an expression to find length of a cable subjected to uniformly distributed load throughout with usual notations. (08 Marks)  
 b. A three hinged parabolic arch is loaded as shown in Fig.Q5(b). Determine the reactions at supports, normal thrust, radial shear and bending moment at left quarter span point.

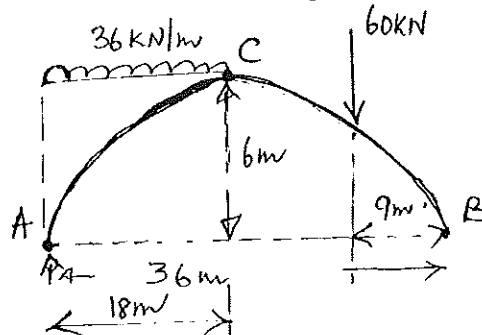


Fig.Q5(b)

(12 Marks)

- 6 a. Draw SFD and BMD for the propped cantilever beam loaded as shown in Fig.Q6(a). Use consistent deformation method.




Fig.Q6(a)

(08 Marks)

- b. For a rigidly fixed beam AB of span 5m carrying a uniformly distributed load of 10 kN/m over the entire span, locate the point of contra flexure and draw BMD and SFD. [Fig.Q6(b)], carryout complete analysis using consistent deformation method.




Fig.Q6(b)

(12 Marks)

- 7 Analyze the continuous beam shown in Fig.Q7, by three moment theorem. E is constant. Draw the BMD and SFD.

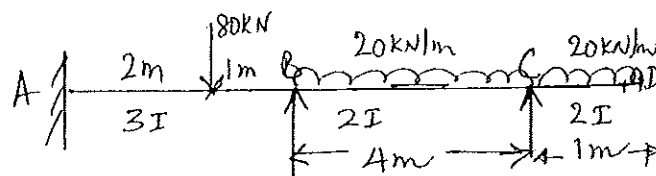


Fig.Q7

(20 Marks)

- 8 A two hinged parabolic arch of constant cross-section has a span of 60 m and a central rise of 10 m. It is subjected to loading as shown in Fig.Q8. Calculate the reactions at supports of the arch, normal thrust and radial shear at 20 m from left support.

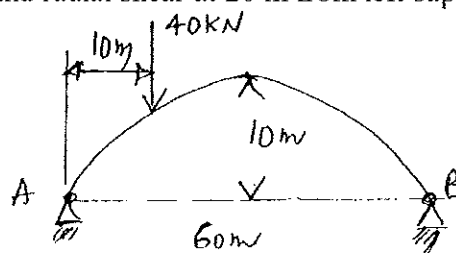


Fig.Q8

(20 Marks)

\*\*\*\*\*