


# CBCS SCHEME

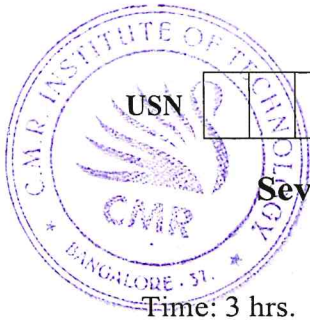

USN									
-----	--	--	--	--	--	--	--	--	--

15CV72

## Seventh Semester B.E. Degree Examination, Aug./Sept.2020 Design of RCC and Steel Structures

Time: 3 hrs.

Max. Marks: 80

- Note: 1. Answer any TWO full questions, choosing ONE full question from each module.  
2. Use of IS-456, IS-800, SP(16), SP(6) and steel tables are permitted.*

### Module-1

- 1 Design a slab type rectangular combined footing for two columns, A = 350 mm × 350 mm and B = 400 mm and 400 mm in size to carry axial service load of 600 kN and 900 kN respectively. The columns are spaced at 3.6 m centre to centre. SBC of soil is 175 kN/m<sup>2</sup>. The property line is 0.74m from centre of column A. Use M20 grade concrete and Fe-415 grade steel. (40 Marks)

OR

- 2 Design a single bay portal frame, fixed at the base for the following data:  
 Effective span of portal frame = 10 m  
 Spacing of portal frame = 4 m  
 Height of column above footing = 5.5 m (effective)  
 Thickness of slab to be adopted = 150 mm  
 Live load on slab = 1.6 kN/m<sup>2</sup>  
 Floor finish = 0.75 kN/m<sup>2</sup>  
 SBC of soil = 200 kN/m<sup>2</sup>  
 Use M20 grade concrete and Fe 415 steel. Design the slab, beam, column and footing. (40 Marks)

### Module-2

- 3 The centre line of a roof truss is as shown in Fig.Q3. The magnitude and nature of forces under service conditions are :  
 Top Chord members = 120 kN Compression  
 Bottom Chord members = 100 kN Tension  
 Interior members = 60 kN Tension and 50 kN Compression  
 For all the interior members use similar single angle sections. Design all the members and joints using M<sub>16</sub> turned bolts of grade 4.6. Also design bearing plate, base plate and anchor bolts to connect the truss to an RCC column 300 mm × 300 mm of M<sub>20</sub> grade concrete.

CMRIT LIBRARY  
BANGALORE - 560 037

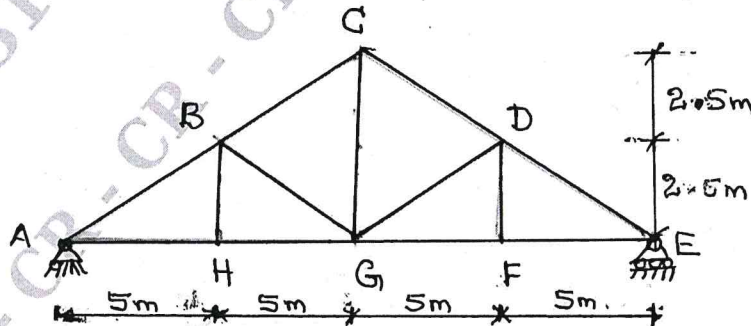


Fig.Q3

(40 Marks)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.  
2. Any revealing of identification, appeal to evaluator and /or equations written eg, 42+8 = 50, will be treated as malpractice.

OR

- 4 Design a welded plate girder, effective span of 18 meters is simply supported at its ends. It carries a uniformly distributed load of 60 kN/m in addition to two point loads each of magnitude 400 kN placed at one third span points. Design:
- (i) Cross section of plate girder at midspan.
  - (ii) End and intermediate stiffeners
  - (iii) Welded connection between flange and web
  - (iv) Welded connection between web and stiffeners

(40 Marks)

\*\*\*\*\*