

FLUID MECHANICS JUNE 2021

IAT-2 SCHEME AND SOLUTION

SOLUTION

1	State the assumptions for Euler's equation and the derive an expression for Euler's equation for a streamline. Also derive Bernoulli's equation from Euler's equation	10	CO4	PO1,PO2	L2
---	---	----	-----	---------	----

This is equation of motion in which the forces due to gravity and pressure are taken into consideration. This is derived by considering the motion of a fluid element along a stream-line as :

Consider a stream-line in which flow is taking place in s -direction as shown in Fig. 6.1. Consider a cylindrical element of cross-section dA and length ds . The forces acting on the cylindrical element are:

1. Pressure force $p dA$ in the direction of flow.
2. Pressure force $\left(p + \frac{\partial p}{\partial s} ds\right) dA$ opposite to the direction of flow.
3. Weight of element $\rho g dA ds$.

Let θ is the angle between the direction of flow and the line of action of the weight of element.

The resultant force on the fluid element in the direction of s must be equal to the mass of fluid element \times acceleration in the direction s .

$$\begin{aligned} \therefore p dA - \left(p + \frac{\partial p}{\partial s} ds\right) dA - \rho g dA ds \cos \theta \\ = \rho dA ds \times a_s \end{aligned} \quad \dots(6.2)$$

where a_s is the acceleration in the direction of s .

Now $a_s = \frac{dv}{dt}$, where v is a function of s and t .

$$= \frac{\partial v}{\partial s} \frac{ds}{dt} + \frac{\partial v}{\partial t} = \frac{v \partial v}{\partial s} + \frac{\partial v}{\partial t} \left\{ \because \frac{ds}{dt} = v \right\}$$

If the flow is steady, $\frac{\partial v}{\partial t} = 0$

$$\therefore a_s = \frac{v \partial v}{\partial s}$$

Substituting the value of a_s in equation (6.2) and simplifying the equation, we get

$$- \frac{\partial p}{\partial s} ds dA - \rho g dA ds \cos \theta = \rho dA ds \times \frac{v \partial v}{\partial s}$$

Dividing by $\rho ds dA$, $-\frac{\partial p}{\rho \partial s} - g \cos \theta = \frac{v \partial v}{\partial s}$

$$\text{or } \frac{\partial p}{\rho \partial s} + g \cos \theta + v \frac{\partial v}{\partial s} = 0$$

But from Fig. 6.1 (b), we have $\cos \theta = \frac{dz}{ds}$

$$\therefore \frac{1}{\rho} \frac{dp}{ds} + g \frac{dz}{ds} + \frac{v dv}{ds} = 0 \quad \text{or} \quad \frac{dp}{\rho} + g dz + v dv = 0$$

$$\text{or } \frac{dp}{\rho} + g dz + v dv = 0 \quad \dots(6.3)$$

Equation (6.3) is known as Euler's equation of motion.

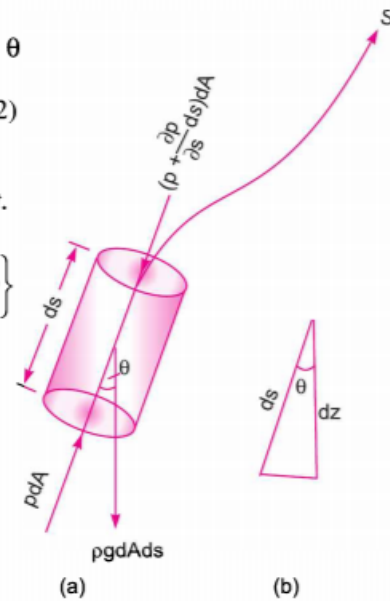


Fig. 6.1 Forces on a fluid element.

Bernoulli's equation is obtained by integrating the Euler's equation of motion (6.3) as

$$\int \frac{dp}{\rho} + \int g dz + \int v dv = \text{constant}$$

If flow is incompressible, ρ is constant and

$$\therefore \frac{p}{\rho} + gz + \frac{v^2}{2} = \text{constant}$$

or
$$\frac{p}{\rho g} + z + \frac{v^2}{2g} = \text{constant}$$

or
$$\frac{p}{\rho g} + \frac{v^2}{2g} + z = \text{constant} \quad \dots(6.4)$$

Equation (6.4) is a Bernoulli's equation in which

$$\frac{p}{\rho g} = \text{pressure energy per unit weight of fluid or pressure head.}$$

$$v^2/2g = \text{kinetic energy per unit weight or kinetic head.}$$

$$z = \text{potential energy per unit weight or potential head.}$$

The following are the assumptions made in the derivation of Bernoulli's equation :

- (i) The fluid is ideal, i.e., viscosity is zero
- (ii) The flow is steady
- (iii) The flow is incompressible
- (iv) The flow is irrotational.

2	Derive an expression for DISCHARGE THROUGH VENTURIMETER	10	CO4	PO1,PO2	L2
---	---	----	-----	---------	----

Consider a venturimeter fitted in a horizontal pipe through which a fluid is flowing (say water), as shown in Fig. 6.9.

Let d_1 = diameter at inlet or at section (1),

p_1 = pressure at section (1)

v_1 = velocity of fluid at section (1),

$$a = \text{area at section (1)} = \frac{\pi}{4} d_1^2$$

and d_2, p_2, v_2, a_2 are corresponding values at section (2).

Applying Bernoulli's equation at sections (1) and (2), we get

$$\frac{p_1}{\rho g} + \frac{v_1^2}{2g} + z_1 = \frac{p_2}{\rho g} + \frac{v_2^2}{2g} + z_2$$

As pipe is horizontal, hence $z_1 = z_2$

$$\therefore \frac{p_1}{\rho g} + \frac{v_1^2}{2g} = \frac{p_2}{\rho g} + \frac{v_2^2}{2g} \quad \text{or} \quad \frac{p_1 - p_2}{\rho g} = \frac{v_2^2}{2g} - \frac{v_1^2}{2g}$$

But $\frac{p_1 - p_2}{\rho g}$ is the difference of pressure heads at sections 1 and 2 and it is equal to h or $\frac{p_1 - p_2}{\rho g} = h$

Substituting this value of $\frac{p_1 - p_2}{\rho g}$ in the above equation, we get

$$h = \frac{v_2^2}{2g} - \frac{v_1^2}{2g} \quad \dots(6.6)$$

Now applying continuity equation at sections 1 and 2

$$a_1 v_1 = a_2 v_2 \quad \text{or} \quad v_1 = \frac{a_2 v_2}{a_1}$$

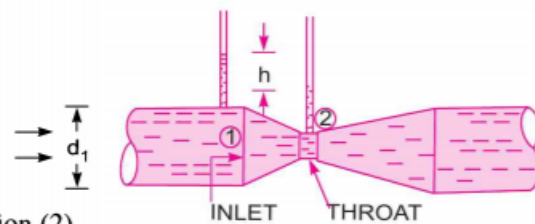


Fig. 6.9 Venturimeter.

Substituting this value of v_1 in equation (6.6)

$$h = \frac{v_2^2}{2g} - \frac{\left(\frac{a_2 v_2}{a_1}\right)^2}{2g} = \frac{v_2^2}{2g} \left[1 - \frac{a_2^2}{a_1^2}\right] = \frac{v_2^2}{2g} \left[\frac{a_1^2 - a_2^2}{a_1^2}\right]$$

or
$$v_2^2 = 2gh \frac{a_1^2}{a_1^2 - a_2^2}$$

$\therefore v_2 = \sqrt{2gh \frac{a_1^2}{a_1^2 - a_2^2}} = \frac{a_1}{\sqrt{a_1^2 - a_2^2}} \sqrt{2gh}$

\therefore Discharge,
$$Q = a_2 v_2 = a_2 \frac{a_1}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh} = \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh} \quad \dots(6.7)$$

Equation (6.7) gives the discharge under ideal conditions and is called, theoretical discharge. Actual discharge will be less than theoretical discharge.

$\therefore Q_{\text{act}} = C_d \times \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh} \quad \dots(6.8)$

where C_d = Co-efficient of venturimeter and its value is less than 1.

3	Water is flowing through a pipe of 5cm diameter under a pressure of 29.43 N/cm ² (guage) and with a mean velocity of 2m/s. Find the total head of water at a cross section, which is 5m above the datum line.	10	CO3	PO1,PO2	L3
---	--	----	-----	---------	----

Solution. Given :

Diameter of pipe = 5 cm = 0.5 m
 Pressure, $p = 29.43 \text{ N/cm}^2 = 29.43 \times 10^4 \text{ N/m}^2$
 Velocity, $v = 2.0 \text{ m/s}$
 Datum head, $z = 5 \text{ m}$
 Total head = pressure head + kinetic head + datum head

Pressure head $= \frac{p}{\rho g} = \frac{29.43 \times 10^4}{1000 \times 9.81} = 30 \text{ m} \quad \left\{ \rho \text{ for water} = 1000 \frac{\text{kg}}{\text{m}^3} \right\}$

Kinetic head $= \frac{v^2}{2g} = \frac{2 \times 2}{2 \times 9.81} = 0.204 \text{ m}$

\therefore Total head $= \frac{p}{\rho g} + \frac{v^2}{2g} + z = 30 + 0.204 + 5 = 35.204 \text{ m. Ans.}$

4	Find the discharge of water flowing through a pipe 30 cm diameter placed in an inclined position where a venturimeter is inserted, having a throat diameter of 15 cm. The difference of pressure between the main and the throat is measured by a liquid of Sp.Gr 0.6 in an inverted u-tube which gives a reading of 30cm. The loss of head between the main and the throat is 0.2 times the kinetic head of the pipe.	10	CO3	PO1,PO2	L3
---	--	----	-----	---------	----

Solution. Dia. at inlet, $d_1 = 30 \text{ cm}$

$\therefore a_1 = \frac{\pi}{4} (30)^2 = 706.85 \text{ cm}^2$

Dia. at throat, $d_2 = 15 \text{ cm}$

$\therefore a_2 = \frac{\pi}{4} (15)^2 = 176.7 \text{ cm}^2$

Reading of differential manometer, $x = 30 \text{ cm}$

Difference of pressure head, h is given by

$$\left(\frac{p_1}{\rho g} + z_1\right) - \left(\frac{p_2}{\rho g} + z_2\right) = h$$

Also
$$h = x \left[1 - \frac{S_f}{S_o} \right]$$

where $S_f = 0.6$ and $S_o = 1.0$

$$= 30 \left[1 - \frac{0.6}{1.0} \right] = 30 \times .4 = 12.0 \text{ cm of water}$$

Loss of head, $h_L = 0.2 \times \text{kinetic head of pipe} = 0.2 \times \frac{v_1^2}{2g}$

Now applying Bernoulli's equation at sections (1) and (2), we get

$$\frac{p_1}{\rho g} + z_1 + \frac{v_1^2}{2g} = \frac{p_2}{\rho g} + z_2 + \frac{v_2^2}{2g} + h_L$$

or
$$\left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right) + \frac{v_1^2}{2g} - \frac{v_2^2}{2g} = h_L$$

But
$$\left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right) = h = 12.0 \text{ cm of water}$$

and
$$h_L = 0.2 \times v_1^2 / 2g$$

$$\therefore 12.0 + \frac{v_1^2}{2g} - \frac{v_2^2}{2g} = 0.2 \times \frac{v_1^2}{2g}$$

$$\therefore 12.0 + 0.8 \frac{v_1^2}{2g} - \frac{v_2^2}{2g} = 0$$

Applying continuity equation at sections (1) and (2), we get

$$a_1 v_1 = a_2 v_2$$

$$\therefore v_1 = \frac{a_2}{a_1} v_2 = \frac{\frac{\pi}{4}(15)^2 v_2}{\frac{\pi}{4}(30)^2} = \frac{v_2}{4}$$

Substituting this value of v_1 in equation (1), we get

$$12.0 + \frac{0.8}{2g} \left(\frac{v_2}{4} \right)^2 - \frac{v_2^2}{2g} = 0 \text{ or } 12.0 + \frac{v_2^2}{2g} \left[\frac{0.8}{16} - 1 \right] = 0$$

or
$$\frac{v_2^2}{2g} [0.05 - 1] = -12.0 \text{ or } \frac{0.95 v_2^2}{2g} = 12.0$$

$$\therefore v_2 = \sqrt{\frac{2 \times 981 \times 12.0}{0.95}} = 157.4 \text{ cm/s}$$

$$\begin{aligned} \therefore \text{Discharge} &= a_2 v_2 \\ &= 176.7 \times 157.4 \text{ cm}^3/\text{s} = 27800 \text{ cm}^3/\text{s} = \mathbf{27.8 \text{ litres/s. Ans.}} \end{aligned}$$

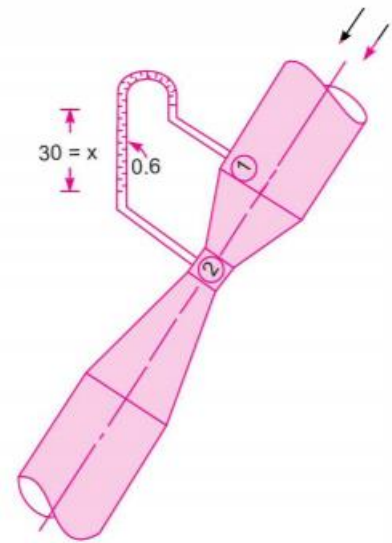


Fig. 6.10

5

Crude oil of specific gravity 0.85 flows upwards at a volume rate of flow of 60 litre per second through a vertical venturimeter with an inlet diameter of 200 mm and a throat diameter of 100mm. The coefficient of discharge of the venturimeter is 0.98. The vertical distance between the pressure tapings is 300mm.

(i) If two pressure gauges are connected at the tapings, determine the difference of readings.

(ii) If a mercury differential manometer is connected, in place of pressure gauges, determine the difference in the level of the mercury column.

10 CO3 PO1,PO2 L3

Solution. Given :

Specific gravity of oil,

$$S_o = 0.85$$

∴ Density,

$$\rho = 0.85 \times 1000 = 850 \text{ kg/m}^3$$

Discharge,

$$Q = 60 \text{ litre/s} \\ = \frac{60}{1000} = 0.06 \text{ m}^3/\text{s}$$

Inlet dia.,

$$d_1 = 200 \text{ mm} = 0.2 \text{ m}$$

∴ Area,

$$a_1 = \frac{\pi}{4} (.2)^2 = 0.0314 \text{ m}^2$$

Throat dia.,

$$d_2 = 100 \text{ mm} = 0.1 \text{ m}$$

∴ Area,

$$a_2 = \frac{\pi}{4} (0.1)^2 = 0.00785 \text{ m}^2$$

Value of C_d

$$= 0.98$$

Let section (1) represents inlet and section (2)

represents throat. Then

$$z_2 - z_1 = 300 \text{ mm} = 0.3 \text{ m}$$

(i) Difference of readings in N/cm^2 of the two pressure gauges

The discharge Q is given by,

$$Q = C_d \frac{a_1 a_2}{\sqrt{a_1^2 - a_2^2}} \times \sqrt{2gh}$$

or

$$0.06 = \frac{0.98 \times 0.0314 \times 0.00785}{\sqrt{0.0314^2 - 0.00785^2}} \times \sqrt{2 \times 9.81 \times h} \\ = \frac{0.98 \times 0.00024649}{0.0304} \times 4.429 \sqrt{h}$$

$$\therefore \sqrt{h} = \frac{0.06 \times 0.0304}{0.98 \times 0.00024649 \times 4.429} = 1.705$$

$$\therefore h = 1.705^2 = 2.908 \text{ m}$$

But for a vertical venturimeter, $h = \left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right)$

$$\therefore 2.908 = \left(\frac{p_1}{\rho g} + z_1 \right) - \left(\frac{p_2}{\rho g} + z_2 \right) = \left(\frac{p_1}{\rho g} - \frac{p_2}{\rho g} \right) + z_1 - z_2$$

$$\frac{p_1 - p_2}{\rho g} = 2.908 + z_2 - z_1 = 2.908 + 0.3 \quad (\because z_2 - z_1 = 0.3 \text{ m})$$

$$= 3.208 \text{ m of oil}$$

$$\therefore p_1 - p_2 = \rho g \times 3.208$$

$$= 850 \times 9.81 \times 3.208 \text{ N/m}^2 = \frac{850 \times 9.81 \times 3.208}{10^4} \text{ N/cm}^2$$

$$= 2.675 \text{ N/cm}^2. \text{ Ans.}$$

(ii) Difference in the levels of mercury columns (i.e., x)

$$\text{The value of } h \text{ is given by, } h = x \left[\frac{S_g}{S_o} - 1 \right]$$

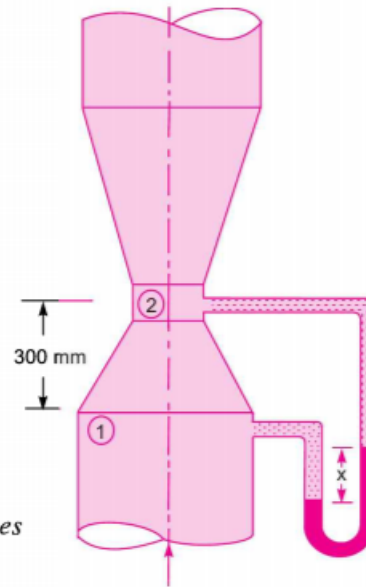


Fig. 6.11 (a)

$$\therefore 2.908 = x \left[\frac{13.6}{0.85} - 1 \right] = x [16 - 1] = 15 x$$

$$\therefore x = \frac{2.908}{15} = 0.1938 \text{ m} = \mathbf{19.38 \text{ cm of oil. Ans.}}$$

SCHEME OF EVALUATION

<i>Question Number</i>	<i>Max Marks</i>	<i>Split-Up</i>	<i>Marks Distribution</i>
1	10	Diagram	2
		Derivation	8
2	10	Diagram	2
		Derivation	8
3	10	Steps	2
		Answer	8
4	10	Steps	2
		Answer	8
5	10	Steps	2
		Answer	8