


CBCGS SCHEME



15EE61

Sixth Semester B.E. Degree Examination, July/August 2022 Control Systems

Max. Marks: 80

Note: Answer any FIVE full questions, choosing ONE full question from each module.

Module-1

- 1 a. With the help of neat block diagram, define open loop and closed loop control system. Mention any four difference between open loop and closed loop control system. (08 Marks)
- b. Construct mathematical model for the mechanical system shown in Fig. Q1 (b). Draw electrical equivalent network based on force voltage analogy. (08 Marks)

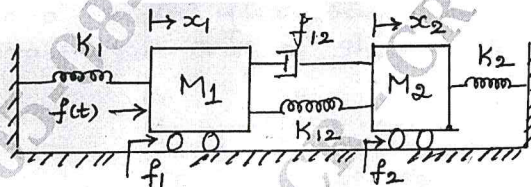


Fig. Q1 (b)

OR

- 2 a. Draw an equivalent mechanical network using force voltage analogy as shown in Fig. Q2 (a). (08 Marks)

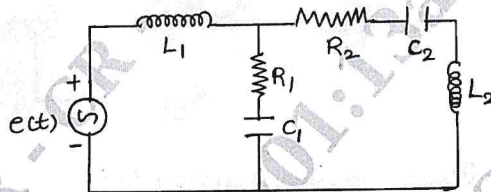


Fig. Q2 (a)

- b. For the mechanical translation system as shown in Fig. Q2 (b). Draw the electrical network based on torque current analogy. Write its performance equations. (08 Marks)

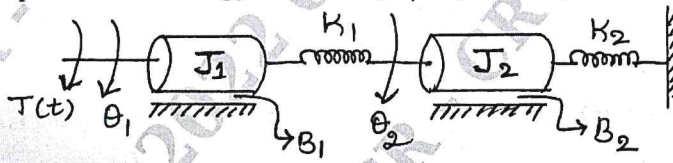


Fig. Q2 (b)

Module-2

- 3 a. What is transfer function? List the limitations of transfer function. (04 Marks)
- b. For the block diagram shown in Fig. Q.3(b). Determine overall transfer function. (06 Marks)

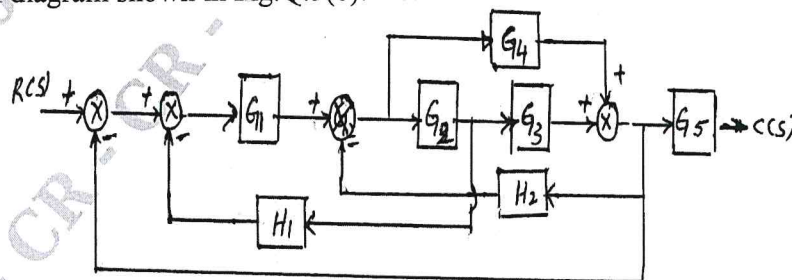


Fig. Q.3(b)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.
2. Any revealing of identification, appeal to evaluator and /or equations written eg. 42+8 = 50, will be treated as malpractice.

- c. Determine transfer function $X_6(S)/X_1(S)$ using Mason's gain formula for the signal flow graph shown in Fig.Q3(c). (06 Marks)

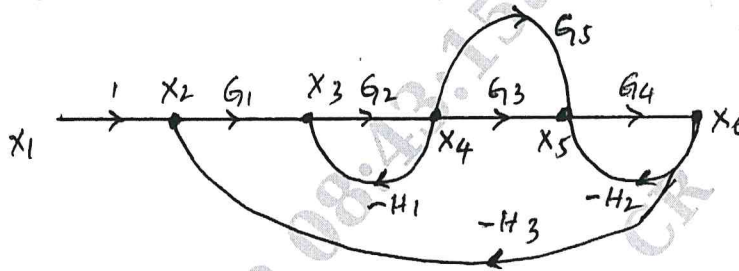


Fig.Q3(c)

OR

- 4 a. Define:
 i) Source and sink node
 ii) Loop and forward path
 iii) Error signal and primary feed back signal. (06 Marks)
- b. For the block diagram shown in Fig.Q.4(b) obtain the overall transfer functions. Draw the signal flow graph and verify the transfer functions using Mason's gain formula. (10 Marks)

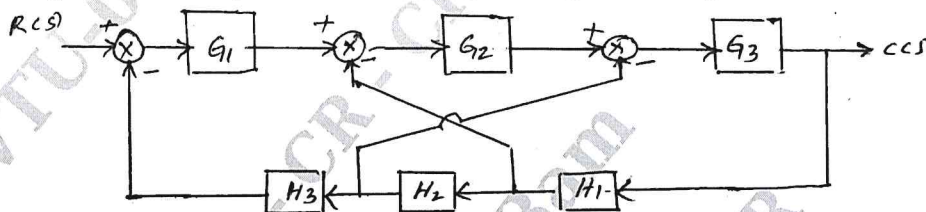


Fig.Q.4(b)

Module-3

- 5 a. What are necessary and sufficient conditions for a system to be stable according to RH criteria. (04 Marks)
- b. Determine the stability of the system represent by following characteristic equation, $s^5 + 4s^4 + 8s^3 + 8s^2 + 7s + 4 = 0$. (04 Marks)
- c. The system shown in Fig. Q5 (c) when subjected to a unit step input gives an output response shown in Fig. Q5 (c). Determine the value of K and T from response curve. (08 Marks)

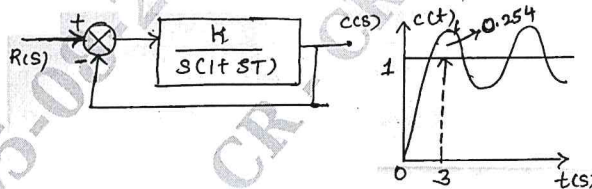


Fig. Q5 (c)

CMRIT LIBRARY
 BANGALORE - 560 037

OR

- 6 a. A system oscillate with frequency " ω " if it has a pole at $s = \pm j\omega$ and no pole in right half of s plane. Determine the value of K and 'a' so that the system shown in Fig. Q6 (a). Oscillate at a frequency of 2 rad/sec. (08 Marks)

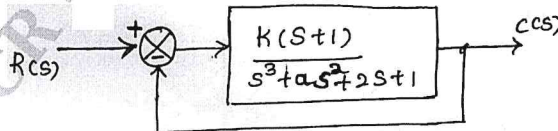


Fig. Q6 (a)

- b. For the system $G(s)H(s) = \frac{K}{s^2(s+2)(s+3)}$ find the value of K to limit steady state error to 10 unit when input to the system is $1+10t + \frac{40t^2}{2}$. (08 Marks)

Module-4

- 7 a. Sketch the root locus for unity FBCS having $G(s) = \frac{K(s+1)}{S(s+2)(s^2+2s+2)}$. Mark the salient points. (12 Marks)
 b. Derive an expression for resonant peak M_r and resonant frequency W_r for a standard second order system. (04 Marks)

OR

- 8 a. A unity FBCS with $G(s) = \frac{10(s+10)}{s(s+2)(s+5)}$. Find gain and phase Margin using bode plot. (12 Marks)
 b. Write note on: i) Break away point ii) Asymptotes. (04 Marks)

Module-5

- 9 a. The open loop transfer function of a control system is $G(s)H(s) = \frac{1}{s^2(s+2)}$. Sketch the Nyquist plot. Ascertain the stability. (10 Marks)
 b. Explain giving equations, the function of integral control. (06 Marks)

CMRIT LIBRARY
 BANGALORE - 560 037

OR

- 10 a. Explain PID controller and discuss the effect on the behaviour of the system. (10 Marks)
 b. Discuss the advantages of Nyquist plot. (06 Marks)
