

**Sixth Semester B.E. Degree Examination, June/July 2017**  
**Finite Element Methods**

Time: 3 hrs.

Max. Marks: 100

**Note:** 1. Answer FIVE full questions, selecting at least TWO questions from each part.  
 2. Missing data may suitably be assumed.

**PART - A**

1.
  - a. Explain with neat sketch, plain stress and plain strain. (06 Marks)
  - b. Sketch the different types of 1D, 2D and 3D elements used in the finite element analysis. (06 Marks)
  - c. Derive the equilibrium equation in elasticity of 3D elastic body subjected to a body force and traction force. (08 Marks)
2.
  - a. Write the properties of stiffness matrix and derive the element stiffness matrix for a 1D bar element. (10 Marks)
  - b. A cantilever beam of span 'L' is subjected to a point at free end. Derive an equation for the deflection at free end by using Rayleigh Ritz method. Assume polynomial displacement function. (10 Marks)
3.
  - a. Define interpolation polynomial, simplex, complex and multiplex element. (04 Marks)
  - b. Explain two Dimensional Pascal's triangle. (06 Marks)
  - c. Derive the shape function for C.S.T element. (10 Marks)
4.
  - a. Determine the nodal displacements, elemental stresses and support reactions for the Fig Q4(a). Use elimination approach to handle the Boundary conditions. (10 Marks)

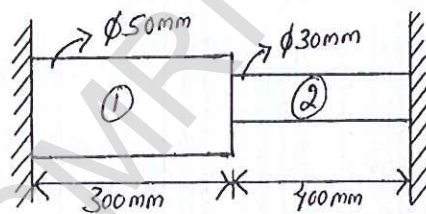


Fig Q4(a)

- (1) Aluminium  
 $E_1 = 0.7 \times 10^5 \text{ MPa}$
- (2) Steel  
 $E_2 = 2 \times 10^5 \text{ MPa}$

- b. Consider the bar shown Fig Q4 (b). An axial load  $P = 60 \times 10^3 \text{ N}$  is applied at its mid point. Using penalty method of handling Boundary conditions. Determine the nodal displacement and support reactions. (10 Marks)

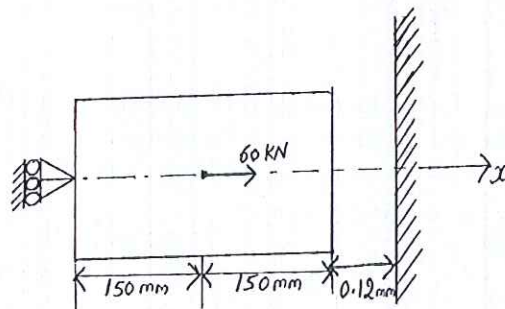


Fig Q4(b)

$$A = 250 \text{ mm}^2$$

$$B = 200 \text{ GPa}$$

**PART - B**

- 5 a. Derive the shape function for a quadratic bar element using Lagrange's interpolation. (05 Marks)
  - b. With a neat sketch explain iso, sub and super parametric elements. (06 Marks)
  - c. Derive Lagrange quadratic quadrilateral element (9 noded quadrilateral element). (09 Marks)
  - 6 a. Derive the expression for stiffness matrix of a truss element. (08 Marks)
  - b. Find the nodal displacement, stress and reaction of truss element shown in the Fig Q6(b). (12 Marks)
- Take  $A = 200\text{mm}^2$ ,  $E = 70\text{GPa}$ .

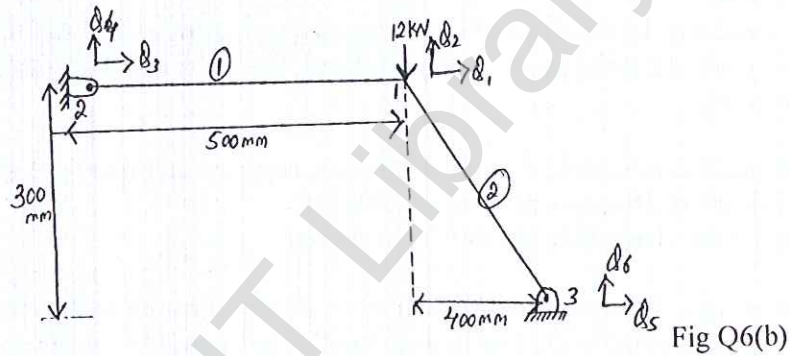


Fig Q6(b)

- 7 a. Derive the Hermite shape function of a beam element. (08 Marks)
- b. For the beam and loading shown in the Fig Q7(b). Determine the end reaction and deflection at midspan. Take  $E = 200\text{ GPa}$ ,  $I = 4 \times 10^8\text{ mm}^4$ . (12 Marks)


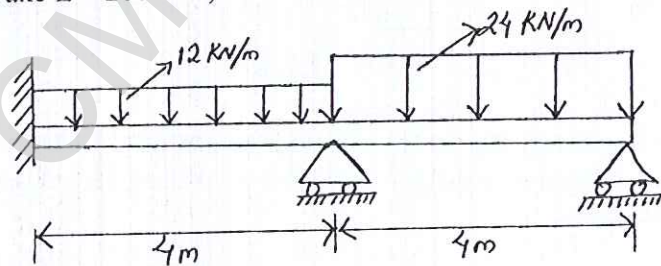


Fig Q7(b)

- 8 a. Discuss the derivation of one dimensional heat transfer in thin fins. (08 Marks)
- b. Determine the temperature distribution in the composite wall using 1D heat elements, use penalty approach of handling boundary conditions (Fig Q8(b)). (12 Marks)

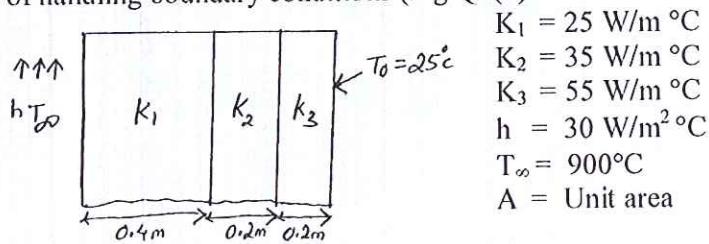

$K_1 = 25\text{ W/m}^\circ\text{C}$   
 $K_2 = 35\text{ W/m}^\circ\text{C}$   
 $K_3 = 55\text{ W/m}^\circ\text{C}$   
 $h = 30\text{ W/m}^2\text{ }^\circ\text{C}$   
 $T_\infty = 900^\circ\text{C}$   
 $A = \text{Unit area}$

Fig Q8(b)

\*\*\*\*\*