

Sub:	Turbo-Machines				
Date:	08/09/2016	Duration:	90 mins	Max Marks:	50
Sem:	5(A&B)				


Code:	10ME56
Branch:	ME

**PART-A (Answer any 2)**


1. Draw the velocity triangle at inlet and exit of a turbomachine in general and derive modified Euler's equation. Also explain the significance of each term in the equation. (10 Marks)

Possible Velocity Triangles


Inlet D<sup>1e</sup>

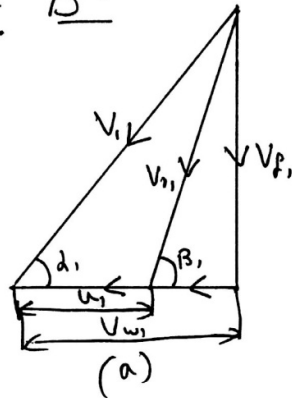


(or)

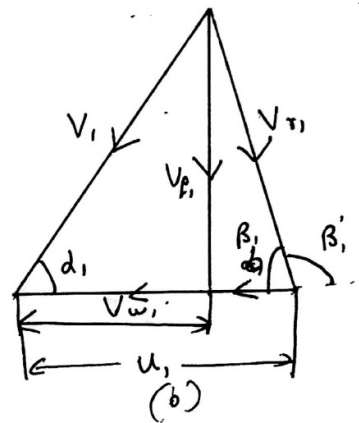

Outlet D<sup>2e</sup>

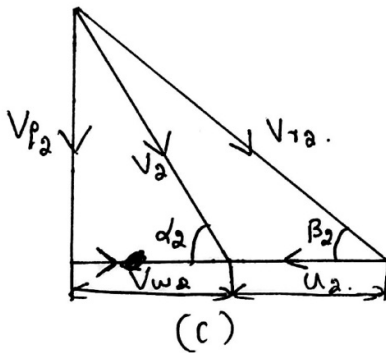

(or)

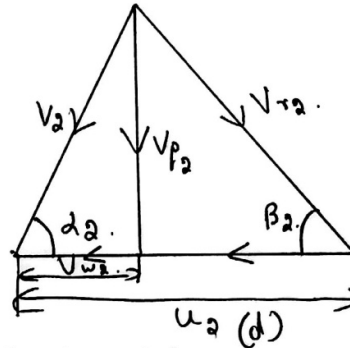

2 MARKS

- $V_1 \rightarrow$  Absolute Velocity of Fluid at inlet.
- $d_1 \rightarrow$  Angle made by  $V_1$
- $u_1 \rightarrow$  Tangential Velocity of the rotor. at inlet.
- $V_{r1} \rightarrow$  Relative Velocity of Fluid at inlet.
- $\beta_1 \rightarrow$  Blade angle or Rotor angle.
- $V_{w1} \rightarrow$  Tangential Component of  $V_1$  at inlet or whirl velocity.
- $V_{p1} \rightarrow$  Flow Velocity at inlet =  $V_R$  or  $V_A$ .
- The Subscript '2' are corresponding components at outlet.

Consider the outlet velocity  $D^{ic}$  [C and D].

In both the cases, there are two possible right angle triangles. [consider either C or D].

$D^{ic} 1 \Rightarrow$  Comprising of  $V_{f2}$ ,  $V_2$  and  $V_{w2}$ .

$D^{ic} 2 \Rightarrow$  Comprising of  $V_{f2}$ ,  $V_{r2}$  and  $(U_2 - V_{w2})$ .

From  $D^{ic} 1$ ,

$$V_2^2 = V_{f2}^2 + V_{w2}^2.$$

$$\Rightarrow V_{f2}^2 = V_2^2 - V_{w2}^2 \quad \text{--- (1)}$$

From  $D^{ic} 2$ ,

$$V_{r2}^2 = V_{f2}^2 + (U_2 - V_{w2})^2. \quad \text{--- (2)}$$

But in Fig (c),  $U_2$  and  $V_{w2}$  are opp in direction. Hence  $(U_2 - V_{w2})$ . In Fig (d),  $U_2$  and  $V_{w2}$  are in same direction. Hence for  $D^{ic} 2$  in Fig (d), the base is  $(U_2 + V_{w2})$ .

$$\text{(2)} \Rightarrow V_{f2}^2 = V_{r2}^2 - [U_2 - V_{w2}]^2 \quad \text{--- (3)}$$

$$\text{(3)} = \text{(1)}$$

$$\Rightarrow V_2^2 - V_{w2}^2 = V_{r2}^2 - U_2^2 - V_{w2}^2 + 2U_2V_{w2}.$$

$$2U_2V_{w2} = V_2^2 + U_2^2 - V_{r2}^2.$$

$$U_2V_{w2} = \frac{1}{2} [V_2^2 + U_2^2 - V_{r2}^2]. \quad \text{--- (4)}$$

Similarly from inlet velocity  $D^{ies}$ , we get.

$$U_1V_{w1} = \frac{1}{2} [V_1^2 + U_1^2 - V_{r1}^2]. \quad \text{--- (5)}$$

3 MARKS

But Euler Turbine equation is.

$$E = U_1 V_{u1} - U_2 V_{u2}.$$

Substituting (4) and (5) in above eqn,

$$E = \frac{1}{2} [V_1^2 + U_1^2 - V_{r1}^2 - V_2^2 - U_2^2 + V_{r2}^2].$$

$$E = \frac{1}{2} [(V_1^2 - V_2^2) + (U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2)] \text{ --- (6)}$$

Eqn (6) is applicable for Power producing type.

For Power Absorbing Machines,

$$E = \frac{1}{2} [(V_2^2 - V_1^2) + (U_2^2 - U_1^2) + (V_{r1}^2 - V_{r2}^2)] \text{ --- (7)}$$

Eqn (6) and (7) are different forms of Euler Turbine Equation.

The three terms inside the bracket of (6) and (7) indicates nature of energy transfer.

Significance of Each term

①  $\frac{1}{2} [V_1^2 - V_2^2]$  represent the change in absolute kinetic energy of the fluid, during its passage. Hence, this term represents the change in dynamic head.

②  $\frac{1}{2} [U_1^2 - U_2^2]$  represent the change in fluid energy due to movement of rotation of fluid from one radius to another. i.e., Centrifugal energy. Hence this term represents the change in static head.

③  $\frac{1}{2} [V_{r2}^2 - V_{r1}^2]$  represents kinetic energy change due to relative velocity change. This will result in change in static head within the rotor.

2 MARKS

1 MARK

1 MARK

1 MARK

2. Define utilization factor for a turbine and derive an expression for the same involving degree of reaction (10 Marks)

"The ratio of ideal work to the energy supplied is called diagram efficiency or utilization factor ( $\epsilon$ )".

The energy available to the rotor are:

- i) Kinetic energy of the fluid at inlet  $(\frac{1}{2} V_1^2)$ .
- ii) The static head available  $[\frac{1}{2} [(U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2)]]$ .

Hence Total energy available is,

$$E_{avail} = \frac{1}{2} [V_1^2 + (U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2)] \quad \text{--- (1)}$$

The energy utilized by the turbine is given by Euler turbine eqn (or) the components of Euler turbine eqn.

$$\Rightarrow E_{utilized} = \frac{1}{2} [(V_1^2 - V_2^2) + (U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2)] \quad \text{--- (2)}$$

Hence, by definition of  $\epsilon$ ,

$$\epsilon = \frac{E_{utilized}}{E_{avail}} = \frac{\frac{1}{2} [(V_1^2 - V_2^2) + (U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2)]}{\frac{1}{2} [V_1^2 + (U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2)]} \quad \text{--- (3)}$$

4 MARKS

Relationship between Utilization Factor and Degree of Reaction

$$\text{Degree of Reaction} = R = \frac{(U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2)}{(V_1^2 - V_2^2) + (U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2)}$$

1 MARK

$$\text{Let, } (U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2) = S.$$

$$(V_1^2 - V_2^2) = D.$$

$$\Rightarrow R = \frac{S}{D+S} \Rightarrow (D+S)R = S.$$

$$\Rightarrow DR + SR = S \Rightarrow DR = S - SR \Rightarrow DR = S(1-R).$$

$$\Rightarrow S = \frac{R}{1-R} D$$

$$\Rightarrow (U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2) = \frac{R}{1-R} (V_1^2 - V_2^2) \quad \text{--- (1)}$$

$$\text{Utilization Factor} = \varepsilon = \frac{(V_1^2 - V_2^2) + C(U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2)}{V_1^2 + (U_1^2 - U_2^2) + (V_{r2}^2 - V_{r1}^2)} \quad \text{--- (2)}$$

Substitute (1) in (2)

$$\Rightarrow \varepsilon = \frac{(V_1^2 - V_2^2) + \frac{R}{1-R} (V_1^2 - V_2^2)}{V_1^2 + \frac{R}{1-R} (V_1^2 - V_2^2)}$$

$$\Rightarrow \varepsilon = \frac{(1-R)(V_1^2 - V_2^2) + R(V_1^2 - V_2^2)}{(1-R)V_1^2 + R(V_1^2 - V_2^2)}$$




$$= \frac{V_1^2 - V_2^2 - \cancel{RV_1^2} + \cancel{RV_2^2} + \cancel{RV_1^2} - \cancel{RV_2^2}}{V_1^2 - \cancel{RV_1^2} + \cancel{RV_1^2} - \cancel{RV_2^2}}$$

$$\boxed{\varepsilon = \frac{V_1^2 - V_2^2}{V_1^2 - RV_2^2}}$$

5 MARKS

**PART-B (Answer all)**

4. Draw inlet and exit velocity triangles for a radial flow machine with i) Backward blade ii) Radial blade iii) Forward blade (8 marks)

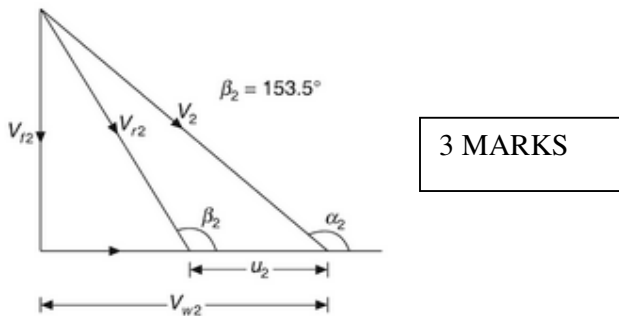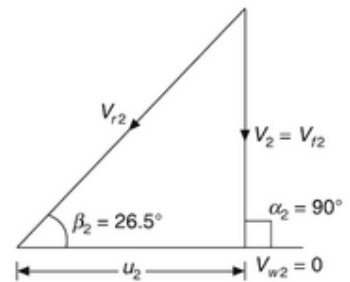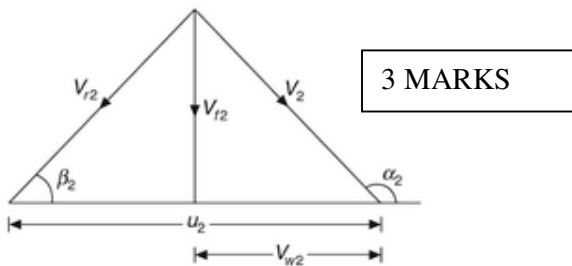

5. Performance of a turbomachine depends on the following variables, Discharge (Q), Speed (N), Rotor diameter (D), Energy per unit mass flow (gH), Power (P), Density ( $\rho$ ), Dynamic viscosity ( $\mu$ ). Using dimensional analysis, obtain the  $\pi$ -terms. (Do not explain the significance) (12 Marks)

SCHEME: EACH  $\pi$ -term carries 4 Marks each

Solution

General Relationship is.

$$f(Q, N, D, gH, P, \rho, \mu) = \text{Constant}$$

No of Variables,  $n = 7$ .

No of Fundamental variables,  $m = 3$ .

No of  $\pi$ -terms =  $(n - m) = 7 - 3 = 4$ .

Dimensions

$$Q = \text{m}^3/\text{s} = \text{L}^3 \text{T}^{-1}$$

$$N = \text{rpm} = 1/\text{s} = \text{T}^{-1}$$

$$D = \text{m} = \text{L}$$

$$gH = \text{m}^2/\text{s}^2 = \text{L}^2 \text{T}^{-2}$$

$$P = \text{J/s} = \text{ML}^2 \text{T}^{-3}$$

$$\rho = \text{kg/m}^3 = \text{ML}^{-3}$$

$$\mu = \text{N-s/m}^2 = \text{ML}^{-1} \text{T}^{-1}$$

Repeating Variables

Geometric Property  $\rightarrow D$

Flow property  $\rightarrow N$

Fluid Property  $\rightarrow \rho$ .

$\pi$ -terms

$$\pi_1 = D^{a_1} N^{b_1} \rho^{c_1} Q$$

$$\pi_2 = D^{a_2} N^{b_2} \rho^{c_2} gH$$

$$\pi_3 = D^{a_3} N^{b_3} \rho^{c_3} P$$

$$\pi_4 = D^{a_4} N^{b_4} \rho^{c_4} \mu$$

$\pi_1$  - term

$$\pi_1 = D^{a_1} N^{b_1} g^{c_1} Q$$

$$M^0 L^0 T^0 = L^{a_1} (T^{-1})^{b_1} (ML^{-3})^{c_1} (L^3 T^{-1})$$

Equating Powers of M,

$$\boxed{0 = c_1}$$

Equating Powers of L,

$$0 = a_1 - 3c_1 + 3$$

$$0 = a_1 + 3$$

$$\boxed{a_1 = -3}$$

Equating Powers of T,

$$0 = -b_1 - 1$$

$$\boxed{b_1 = -1}$$

$$\therefore \pi_1 = D^{-3} N^{-1} g^0 Q$$

$$\boxed{\pi_1 = \frac{Q}{ND^3}}$$

$\pi_2$  - term

$$\pi_2 = D^{a_2} N^{b_2} g^{c_2} g H$$

$$M^0 L^0 T^0 = L^{a_2} (T^{-1})^{b_2} (ML^{-3})^{c_2} (L^2 T^{-2})$$

Equating Powers of M,

$$\boxed{0 = c_2}$$

Equating Powers of L,

$$0 = a_2 - 3c_2 + 2$$

$$\Rightarrow \boxed{a_2 = -2}$$

Equating Powers of T,

$$0 = -b_2 - 2$$

$$\Rightarrow \boxed{b_2 = -2}$$

$$\pi_2 = D^{-2} N^{-2} g^0 g H$$

$$\boxed{\pi_2 = \frac{gH}{D^2 N^2}}$$

$\pi_3$  - term

$$\pi_3 = D^{a_3} N^{b_3} g^{c_3} P$$

$$M^0 L^0 T^0 = L^{a_3} (T^{-1})^{b_3} (ML^{-3})^{c_3} ML^2 T^{-3}$$

Equating Powers of M,

$$0 = c_3 + 1$$

$$\Rightarrow \boxed{c_3 = -1}$$

Equating Powers of L,

$$0 = a_3 - 3c_3 + 2$$

$$\Rightarrow \boxed{a_3 = -5}$$

Equating Powers of T,

$$0 = -b_3 - 3$$

$$\Rightarrow \boxed{b_3 = -3}$$

$$\pi_3 = D^{-5} N^{-3} g^{-1} P$$

$$\boxed{\pi_3 = \frac{P}{gN^3 D^5}}$$

$\pi_4$  - term

$$\pi_4 = D^{a_4} N^{b_4} g^{c_4} \mu$$

$$M^0 L^0 T^0 = L^{a_4} (T^{-1})^{b_4} (ML^{-3})^{c_4} (ML^{-1} T^{-1})$$

Equating Powers of M,

$$0 = c_4 + 1$$

$$\Rightarrow \boxed{c_4 = -1}$$

Equating Powers of T,

$$0 = -b_4 - 1$$

$$\Rightarrow \boxed{b_4 = -1}$$

Equating Powers of L,

$$0 = a_4 - 3c_4 - 1$$

$$\Rightarrow \boxed{a_4 = -3}$$

$$\pi_4 = D^{-3} N^{-1} g^{-1} \mu$$

$$\boxed{\pi_4 = \frac{\mu}{gND^3}}$$



**PART- C (Answer any one)**

6. In a certain turbo machine, the inlet whirl velocity is 15m/s, inlet flow velocity is 10m/s, blade speeds are 30m/s and 8m/s respectively. Discharge is radial with an absolute velocity of 15 m/s. If water is the working fluid, flowing at the rate of 1500 litre/s, calculate: i) Power in kW ii) the change in total pressure in bar iii) the degree of reaction and iv) Utilization factor. (10 Marks)

Data

$R = 0.5$

$U = 98.5 \text{ m/s}$


$V_1 = V_{r2} = 155 \text{ m/s}$

$\beta_2 = \alpha_1 = 18^\circ$

$\dot{m} = 10 \text{ kg/s}$

To find,

$\beta_1, P \text{ \& } E$

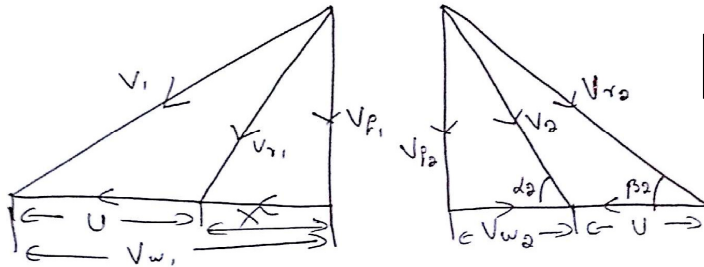

1 MARKS

$V_{w1} = V_1 \cos \alpha_1 = 155 \cos 18 = 147.4 \text{ m/s}$

$V_{p1} = V_1 \sin \alpha_1 = 155 \sin 18 = 47.9 \text{ m/s}$

$X = V_{w1} - U = 147.4 - 98.5 = 48.9 \text{ m/s} = V_{w2}$

$V_{r1} = \sqrt{X^2 + V_{p1}^2} = 68.45 \text{ m/s} = V_2$

$\beta_1 = \tan^{-1} \left[ \frac{V_{p1}}{X} \right] = 44.4^\circ = \alpha_2$

4 MARKS

Power Output,  $P = \dot{m} U (V_{w1} + V_{w2})$   
 $= 10 \times 98.5 (147.4 + 48.9)$

$P = 19.34 \text{ kW}$

3 MARKS

$E = \frac{E}{E + V_0^2/2} = \frac{19.34}{19.34 + \left(\frac{68.45}{2}\right)^2} = 0.892$


2 MARKS



7. The velocity of fluid from the nozzle in an axial flow impulse turbine is 1200 m/s. The nozzle angle is  $22^\circ$ . If the rotor blades are equiangular and the rotor tangential blade speed is 400m/s, find i) The rotor blade angles ii) The tangential force on the blade rings iii) Power Output iv) Utilization Factor. Assume  $V_{r1}=V_{r2}$  (10 Marks)

Data :  $V_1 = 1200 \text{ m/s}$        $\alpha_1 = 22^\circ$        $\beta_1 = \beta_2$   
 $u = 400 \text{ m/s}$        $V_{r1} = V_{r2}$

To find :  $\beta_1 = \beta_2 = ?$  ,  $F_T = ?$  ,  $P = ?$  ,  $\epsilon = ?$

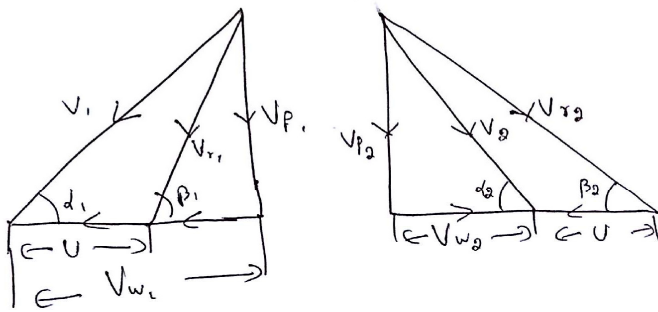

$$\cos \alpha_1 = \frac{V_{w1}}{V_1} \Rightarrow \cos 22^\circ = \frac{V_{w1}}{1200}$$

$$V_{w1} = 1112.6 \text{ m/s.}$$

$$V_1^2 = V_{p1}^2 + V_{w1}^2 \Rightarrow 1200^2 = V_{p1}^2 + 1112.6^2$$

$$\Rightarrow V_{p1} = 449.53 \text{ m/s}$$

$$\tan \beta_1 = \frac{V_{p1}}{V_{w1} - u} = \frac{449.53}{1112.6 - 400}$$

$$\Rightarrow \boxed{\beta_1 = 32.24^\circ = \beta_2}$$

2 MARKS

$$\cos \beta_2 = \frac{u + V_{w2}}{V_{r2}} \Rightarrow \cos 32.24^\circ = \frac{400 + V_{w2}}{842.6}$$

$$\Rightarrow V_{w2} = 312.66 \text{ m/s.}$$

$$F_T = \dot{m} (V_{w1} + V_{w2})$$

$$= 1 \times (1112.6 + 312.66)$$

$$\boxed{F_T = 1425.27 \text{ N}}$$

2 MARKS

$$\text{Power Developed, } P = F_T \times u$$

$$= 1425.27 \times 400$$

$$P = 570.09 \text{ kW}$$

2 MARKS

Utilization Factor

$$\epsilon = \frac{V_1^2 - V_2^2}{V_1^2}$$

$$V_2^2 = V_{r_2}^2 + u^2 - 2V_{r_2}u \cos \beta_2$$

$$= 842.6^2 + 400^2 - 2 \times 842.6 \times 400 \times \cos 32.24$$

$$V_2 = 547.49 \text{ m/s.}$$

$$\epsilon = 0.79$$

2 MARKS