USN					




Internal Assessment Test 1 – May 2021

Sub:	Software Testing-Scheme and Solutions			Sub Code: 18CS62/17   Bro		Bran	anch: ISE			
		90 min's	M. M. L. 50		CS62		V11.		OBE	
Date:		Max Marks: 50 VE FULL Questions	Sem/Sec:	VI A,B&C		МΔ	RKS		RBT	
1a)	Differentiate Error, Fault, and Failure with example  Definition:2 marks  Example: 2 marks  Error Fault Failure							4]	CO1	L2
	e.g; Error in business logic in Requirements. discount 15% instead of 10% for purchase Rs.	A fault an erro represe error, v represe mode o such as dataflo hierarc code, a	is the result of r. fault is the entation of an where entation is the of expression, anarrative text, w diagrams, hy charts, source and so on.  SRS and in an calculation	When far executed occur.	ult code is failure will eduction value customer	e				
1b)	What is the use of Venn dis Point 1: 1mark Two diagrams and Expla	nation: 2	3.5+2.5 = 5 marks	_			[	6]	CO1	L2
	• Venn Diagrams are helpf certain specified behaviors (implemented) behaviors commission and to errors • Specified and implemented Program behaviors	and certain pee correspon	programmed d to faults of	ind						
	Explanation:1.5 marks									

	Specified, implemented, and tested beh	naviors			
	Program behaviors				
	Specification (expected)  5 2 6 (implement)  7 Test cases (verified)  Explanation: 1.5 marks				
2a)	Compare specification testing with code based	testing	[4]	CO2	L2
	Advantages (1) they are independent of how the software is implemented, so if the implementation changes, the test cases are still useful; and (2) test case development can occur in parallel with the implementation, thereby reducing the overall project development interval.	it is sometimes called white box (or even clear box) testing.  The essential difference is that the implementation(of the black box) is known and used to identify test cases.  code-based testing uses the program source code (implementation) as the basis of test case identification.  The ability to "see inside" the black box allows the tester to identify test cases on the basis of how the function is actually implemented.			
	Disadvantages: specification based test cases frequently suffer from two problems: significant redundancies may exist among test cases, compounded by the possibility of gaps of untested software	High Test case coverage.ess Redundancy. Gaps are covered			
2b)	Write and explain the improved version of reases using Normal Boundary value analysi Program: 3Marks Test cases: 2 marks Explanation: 1 Mark		[6]	CO1	L3

```
Program triangle3'
Dim a, b, c As Integer
Dim c1, c2, c3, IsATriangle As Boolean
'Step 1: Get Input
   Output("Enter 3 integers which are sides of a triangle")
   Input(a, b, c)
   c1 = (1 \le a) \text{ AND } (a \le 300)
   c2 = (1 \le b) AND (b \le 300)
   c3 = (1 \le c) AND (c \le 300)
   If NOT(c1)
        Then Output ("Value of a is not in the range of permitted values")
   EndIf
   If NOT(c2)
        Then Output ("Value of b is not in the range of permitted values")
   EndIf
   If NOT(c3)
        ThenOutput("Value of c is not in the range of permitted values")
   EndIf
Until c1 AND c2 AND c3
Output ("Side A is", a)
Output ("Side B is",b)
Output ("Side C is",c)
'Step 2: Is A Triangle?
If (a < b + c) AND (b < a + c) AND (c < a + b)
   Then IsATriangle = True
   Else IsATriangle = False
EndIf
'Step 3: Determine Triangle Type
If IsATriangle
    Then If (a = b) AND (b = c)
              Then Output ("Equilateral")
              Else If (a \neq b) AND (a \neq c) AND (b \neq c)
                        Then Output ("Scalene")
                        Else Output ("Isosceles")
                    EndIf
          EndIf
    Else Output ("Not a Triangle")
EndIf
End triangle3
```

Case	a	b	С	Expected Output		
1	100	100	1	Isosceles		
2	100	100	2	Isosceles		
3	100	100	100	Equilateral		
4	100	100	199	Isosceles		
5	100	100	200	Not a triangle		
6	100	1	100	Isosceles		
7	100	2	100	Isosceles		
8	100	100	100	Equilateral		
9	100	199	100	Isosceles		
10	100	200	100	Not a triangle		
11	1	100	100	Isosceles		
12	2	100	100	Isosceles		
13	100	100	100	Equilateral		
14	199	100	100	Isosceles		
15	200	100	100	Not a triangle		
)iagran	est and Debug C n: 3marks ation: 3 mar		eat diagram		[6]	CO1

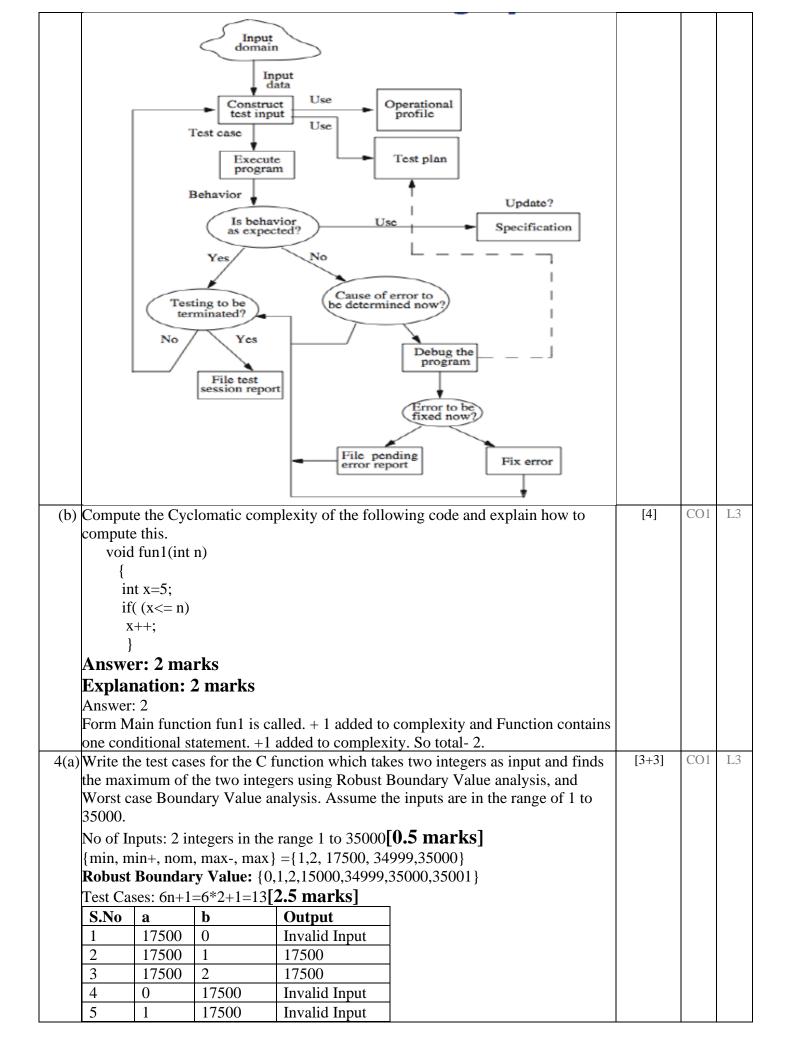

6	2	17500	17500
7	17500	34999	34999
8	17500	35000	35000
9	17500	17500	17500
10	34999	17500	34999
11	35000	17500	35000
12	35001	17500	35001
13	17500	17500	17500

### Worst case Boundary Value analysis [0.5 marks]

 $\{\min, \min+, nom, \max-, \max\} = \{1, 2, 17500, 34999, 35000\}$ 

Number of Test cases:=  $5^n = 5*5=25$ 

# [2.5 marks]If minimum 10 test cases if they write also give 2.5 marks

S.No	a	b	Output
1	1	1	Invalid Input
2	1	2	17500
3	1	17500	17500
4	1	34999	Invalid Input
5	1	35000	Invalid Input
6	2	1	17500
7	2	2	34999
8	2	17500	35000
9	2 2 2	34999	17500
10	2	35000	34999
11	17500	1	35000
12	17500	2	35001
13	17500	17500	17500
14	17500	34999	Invalid Input
15	17500	35000	17500
16	34999	1	17500
17	34999	2	Invalid Input
18	34999	17500	Invalid Input
19	34999	34999	17500
20	34999	35000	34999
21	35000	1	35000
22	35000	2	17500
23	35000	17500	34999
24	35000	34999	35000
25	35000	35000	35001

## (b) Define the following software quality attributes

a) Reliability b) Consistency

#### 2\*2=4 marks

Reliability: Probability of failure of a software product with respect to a given operational profile in a given environment. is the probability of failure free operation of software in its intended environment.


#### Consistency:

refers to adherence to a common set of conventions and assumptions. For example, all buttons in the user interface might follow a common color coding convention. An example of inconsistency would be when a database application displays the

[04]

CO1 L2


5 Ex (a)				
	Explain Test generation strategies with diagram	[5]	CO1	L2
•	They need subset of requirements to be modeled using a formal notation which is called as specification. The tests are generated from specification using FSMs, Statecharts, Petri Nets and Timed I/O Automata notations for modeling.  Unified modeling language can also used for modeling the requirements into proper specification for test case generation.			
dia	Explain how to write a Oracle program for GUI with example. Draw the state liagram for the same.  Example with diagram 2 marks	[5]	CO1	L3

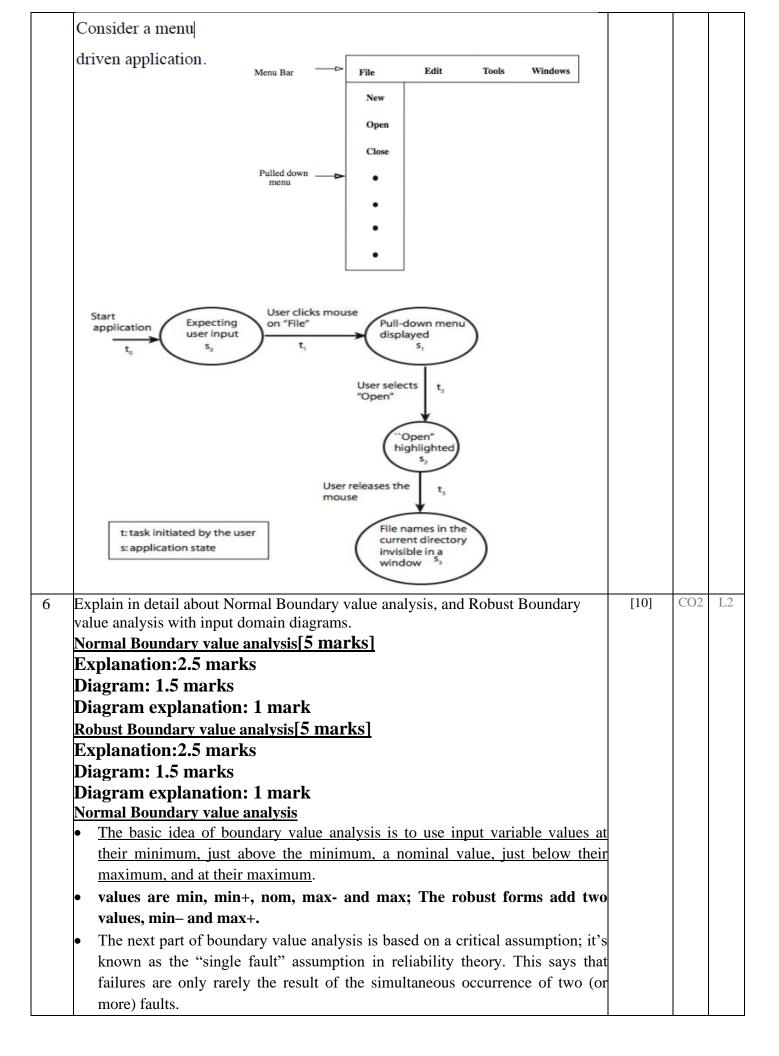

- Thus the boundary value analysis test cases are obtained by holding the values of all but one variable at their nominal values, and letting that variable assume its extreme values.
- The boundary value analysis test cases for our function F of two variables are:


{<x1nom, x2min>, <x1nom, x2min+ >,<x1nom, x2nom>,<x1nom, x2max- >,<x1nom, x2max>, <x1min, x2nom >, <x1min+, x2nom >, <x1max-, x2nom >,<x1max, x2nom > }

• These are illustrated in the following Figure.

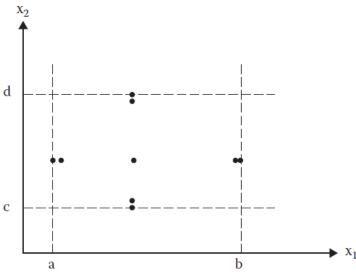

#### Robust Boundary value analysis

- Robust boundary value testing is a simple extension of normal boundary value testing: in addition to the five boundary value analysis values of a variable, we see what happens when the extrema are exceeded with a value slightly greater than the maximum (max+) and a value slightly less than the minimum (min-).
- Robustness test cases for our continuing example are shown in Figure.

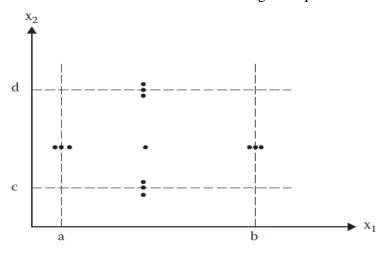

- Most of the discussion of boundary value analysis applies directly to robustness testing, especially the generalizations and limitations. The most interesting part of robustness testing is not with the inputs but with the expected outputs.
- The main value of robustness testing is that it forces attention on exception handling. With strongly typed languages, robustness testing may be very awkward.
- Pascal, for example, if a variable is defined to be within a certain range, values

outside that range result in run-time errors that abort normal execution.	
• This raises an interesting question of implementation philosophy: is it better to	
perform explicit range checking and use exception handling to deal with	
"robust values," or is it better to stay with strong typing? The exception	
handling choice mandates robustness testing.	